


## Universal Plus basement drain ver., black, Backw.valve, Waterpr.concr.

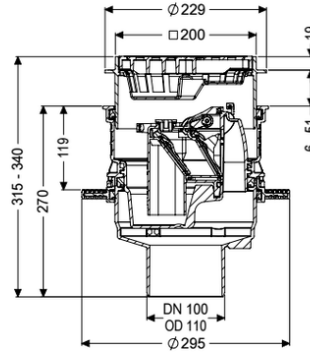

### Article information

Item no.: 27631  
GTIN: 4026092096864  
Price group: 10

### Advantages

- Sustainable due to use of recycled material
- Inlets above the floor slab, no penetration required
- Vertical outlet for easy installation and easy access to the main drainage pipe

### Description

The polymer Universal Plus basement drain is used for drainage of non-faecal wastewater and is equipped with a removable backwater valve with two backwater flaps and a one hand-lockable emergency closure. Including temporary protective cover. The drain is pressure-waterproof up to 0.6 bar (MFPA Leipzig tested) and radon-tight (IAF Radioökologie GmbH tested).

#### Variant

|                                            |                              |
|--------------------------------------------|------------------------------|
| Contents of sludge trap:                   | yes                          |
| Emergency closure:                         | yes                          |
| Waterproof flange:                         | Pre-assembled at the factory |
| Sealing water height:                      | 60 mm                        |
| Discharge rate (l/s) with 10 mm backwater: | 1,4                          |
| Discharge rate (l/s) with 20 mm backwater: | 1,9                          |
| Mechanical backwater flaps:                | 2                            |

#### General characteristics

|                         |                         |
|-------------------------|-------------------------|
| Colour:                 | black                   |
| Standard:               | EN 1253                 |
| Nominal size (DN):      | 100                     |
| Type of wastewater:     | without sewage          |
| Installation situation: | floor slab installation |

|                           |                                     |
|---------------------------|-------------------------------------|
| Backwater protection:     | Type 5                              |
| Dimensions                |                                     |
| Net weight:               | 3,21 kg                             |
| Gross weight:             | 3,62 kg                             |
| Diameter:                 | 295 mm                              |
| Cutout dimension, width:  | 310 mm                              |
| Cutout dimension, length: | 310 mm                              |
| Vertical installation:    | 23 - 80                             |
| Installation depth:       | 293 - 350 mm                        |
| Vertical adjustment:      | vertically adjustable upper section |
| Height:                   | 270 mm                              |
| Packaging dimension:      | length                              |
| Packaging dimension:      | width                               |
| Packaging dimension:      | height                              |
| Tank/drain body           |                                     |
| System:                   | vertical                            |
| Coverage features         |                                     |
| Type of cover:            | Slotted cover                       |
| Cover material:           | Polymer                             |
| Colour of cover:          | black                               |
| Width of cover:           | 200 mm                              |
| Height of cover:          | 25 mm                               |
| Length of cover:          | 200 mm                              |
| Load class:               | K 3 (EN 1253-1)                     |
| Contents of sludge trap:  | yes                                 |